

marantz® SR6003 Multi-zone flowchart

First, Install your multi-zone speakers and connect them to the multi-zone speaker terminals. Now, follow these simple steps...

The SR6003 includes a feature called 'Multi-zone'. This means it can be used to play music in another room in your home, or even outside. This 4-step flowchart covers the basics in getting a pair of speakers working in another room, using two of the seven the on-board amplifiers in your SR6003.

- The music playing in your other room can be completely different to the music playing in your home theatre room. For example: a DVD can be playing in your lounge room, while a CD can be playing in the kitchen — and at different volumes, too!
- The set-up described here is a basic method of achieving multi-zone sound. There are other, more sophisticated ways to send music around your home using the SR6003—and you can even control the SR6003 from another room. These types of systems are more advanced, so we suggest you consult with a professional Custom Installer to help you specify, install and configure a system exactly to your needs.

SR6003 rear panel



Speaker 'C' switch must be OFF for Multi-zone use

The 'zone' 'A' button on the remote control activates the line-level output, not the zone 'A' speaker terminals. This line-level output is used for an external amplifier (such as the Marantz SR4021) or to send sound to a second room TV.

In this basic multi-zone system you will need:


1. An additional pair of speakers (such as bookshelf, in-wall or in-ceiling)
2. Good quality speaker cable of appropriate length
3. An ability to install and conceal the speaker cables to your desired location (if in doubt, we again suggest using a professional Installer).

• The multi-zone speaker terminals on the SR6003 are the same terminals as the Surround Back terminals. Therefore, the SR6003 can be wired for only 5.1 channel operation when the Surround Back terminals are wired for multi-zone use.


• Activating multi-zone speakers must be done using the 'Z.SPKR' button on the remote control supplied with the SR6003. Once activated, you can use either the front panel or the SR6003 remote to choose a source and set the volume for the speakers in the multi 'A' zone.

• There are additional multi-zone 'control' features and a zone 'B' feature which are not discussed here. Read the SR6003 User Guide and contact your professional Custom Installer for advice on how to use these features.


Analogue input sockets, SR6003 rear panel

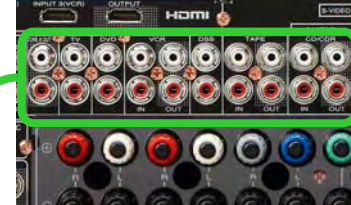



SR6003 Set-up menu using On Screen Display; Inset: Set-up Menu message in front window

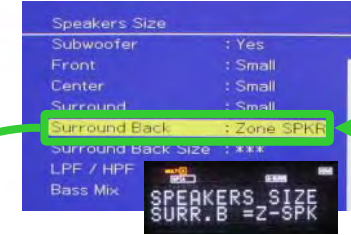

SR6003 remote control (RC003SR)

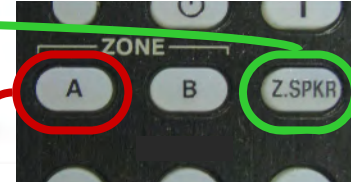

The 'MULTI (A)' indicator flashes when the SR6003 is in multi-zone mode. While flashing, multi-zone adjustments can be made.

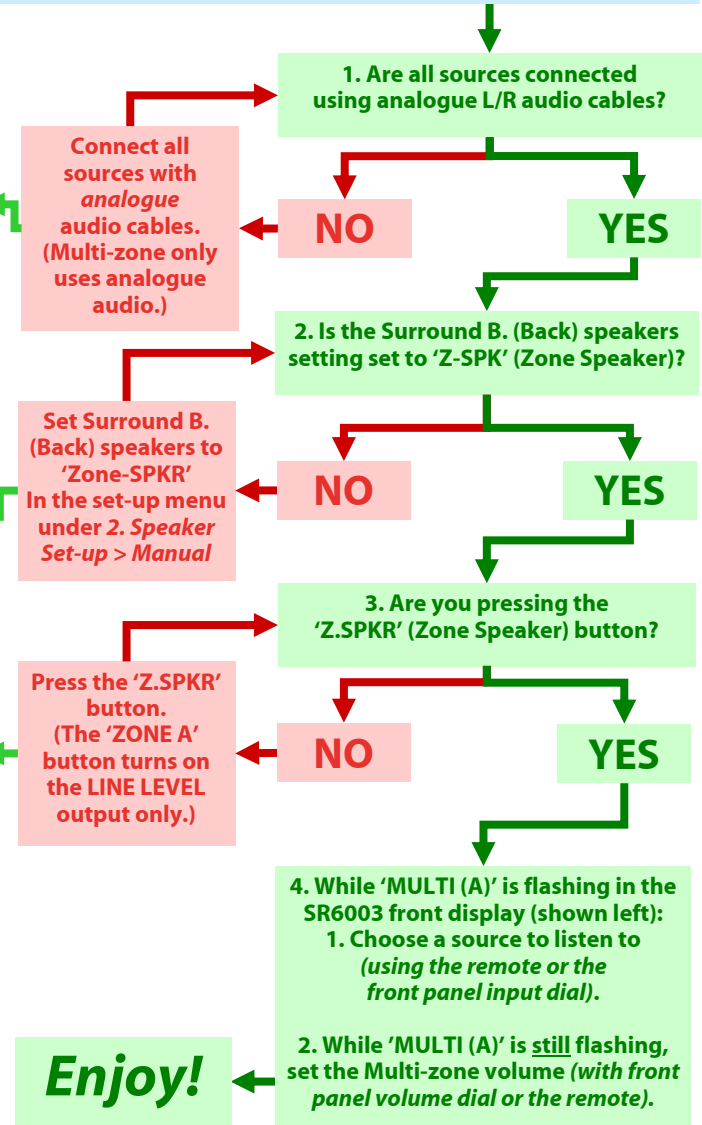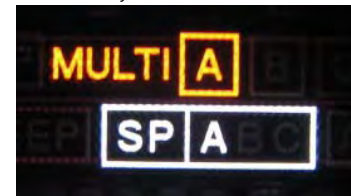

Connect all sources with analogue audio cables. (Multi-zone only uses analogue audio.)

Set Surround B. (Back) speakers to 'Zone-SPKR' in the set-up menu under 2. Speaker Set-up > Manual

Press the 'Z.SPKR' button. (The 'ZONE A' button turns on the LINE LEVEL output only.)

Enjoy!

To adjust the volume up or down:

1. Press 'Z.SPKR' button (the 'MULTI (A)' indicator goes out. Multi-zone speakers are turned off.)
2. Press 'Z.SPKR' again (Multi-zone speakers activate again and 'MULTI (A)' flashes)
3. While 'MULTI (A)' is flashing, use the volume dial or the remote control to adjust the volume.

To SHUT DOWN the multi-zone speakers:

Press the 'Z.SPKR' button once; the 'MULTI (A)' indicator goes out and multi-zone speakers are turned off.